
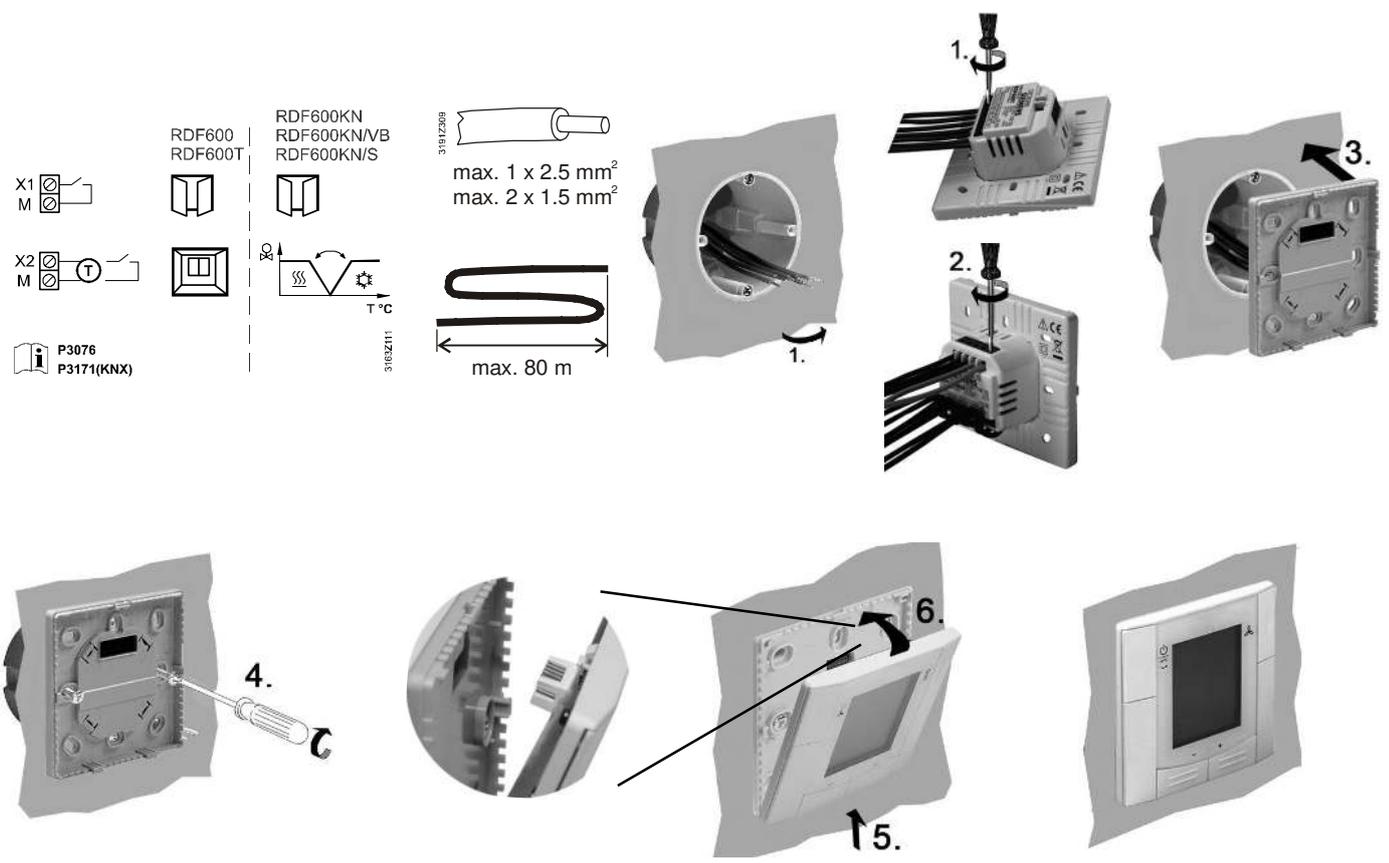
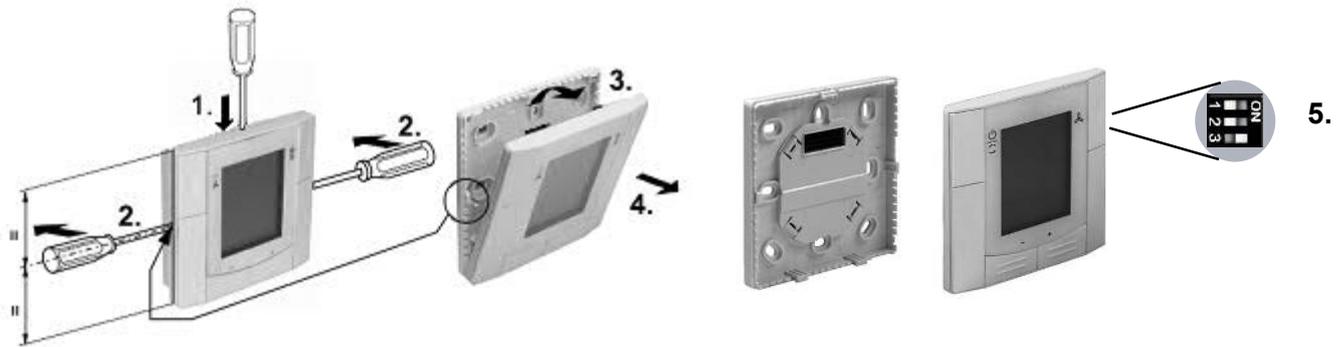
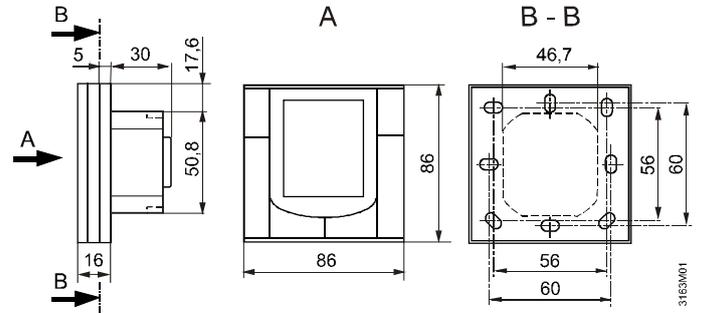


RDF600
RDF600T
RDF600KN
RDF600KN/VB
RDF600KN/S

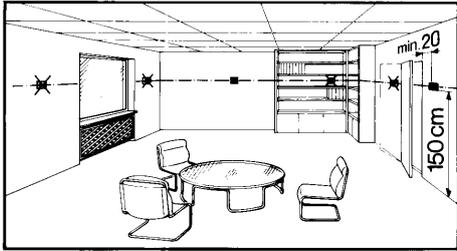

RDF600 RDF600T	RDF600KN RDF600KN/S RDF600KN/VB		
	KNX		
en 2-pipe de 2-Rohr fr 2 tubes es 2-tubos tr 2-borulu zh 两管制 it 2-tubi nl 2-pijps		Δ AC 230 V	Δ AC 230 V

	KNX		
en 2-pipe with electric heater de 2-Rohr mit Elektro-Heizung fr 2 tubes chaud électrique es 2-tubos con batería eléctrica tr 2-borulu elk. isiticiili zh 带电加热器的两管制系统 it 2-tubi con batteria elettrica nl 2-pijps met elektr.verwarmer		Δ AC 230 V	Δ AC 230 V

	KNX		
en 4-pipe de 4-Rohr fr 4 tubes es 4-tubos tr 4-borulu zh 四管制 it 4-tubi nl 4-pijps		Δ AC 230 V	Δ AC 230 V

	KNX	
en 2-pipe, 3-position output de 2-Rohr, 3-Punkt Ausgang fr 2 tubes, sortie 3pts es 2-tubos, salida a 3 puntos tr 2-borulu, 3-konumlu çıkis zh 两管制, 三位控制输出 it 2-tubi, uscita a 3-punti nl 2-pijps, 3-punts uitgang		Δ AC 230 V

